

1 **THE APPLICATION OF A MICROSIMULATION MODEL SYSTEM TO THE**  
2 **ANALYSIS OF A LIGHT RAIL CORRIDOR: INSIGHTS FROM A TRANSIMS**  
3 **DEPLOYMENT**

4  
5  
6 **Sarah Ellie Volosin**

7 School of Sustainable Engineering and the Built Environment, Arizona State University  
8 Room ECG252, Tempe, AZ 85287-5306. Tel: (480) 965-3589; Fax: (480) 965-0557  
9 Email: [sarah.volosin@asu.edu](mailto:sarah.volosin@asu.edu)

10  
11 **Sanjay Paul**

12 School of Sustainable Engineering and the Built Environment, Arizona State University  
13 Room ECG252, Tempe, AZ 85287-5306. Tel: (480) 965-3589; Fax: (480) 965-0557  
14 Email: [spaul7@asu.edu](mailto:spaul7@asu.edu)

15  
16 **Ram M. Pendyala**

17 School of Sustainable Engineering and the Built Environment, Arizona State University  
18 Room ECG252, Tempe, AZ 85287-5306. Tel: (480) 727-9164; Fax: (480) 965-0557  
19 Email: [ram.pendyala@asu.edu](mailto:ram.pendyala@asu.edu)

20  
21 **Brian Grady**

22 Resource Systems Group, Inc., 55 Railroad Row, White River Junction, VT 05001  
23 Tel: 802-295-4999  
24 Email: [brian.grady@rsginc.com](mailto:brian.grady@rsginc.com)

25  
26 **Brian Gardner**

27 U.S. Department of Transportation, Federal Highway Administration  
28 Office of Metropolitan Planning and Programs, 1200 New Jersey Avenue, SE, HEPP-30  
29 Washington, District of Columbia 20590. Tel: (202) 366-4061; Fax: (202) 493-2198  
30 Email: [brian.gardner@dot.gov](mailto:brian.gardner@dot.gov)

31  
32  
33 *Submitted for Presentation and Publication to*  
34 *Committee ADB50: Transportation Planning Applications*

35  
36 *91st Annual Meeting of the Transportation Research Board, January 22-26, 2012*

37  
38  
39 Word count: 7250 (text) + 6 (tables/figures) x 250 = 8750 equivalent words

40  
41  
42 August 1, 2011

43

1 **ABSTRACT**

2 The increasingly complex transportation challenges faced by urban areas around the country call  
3 for the use of new tools capable of microsimulating the movements of individual travelers and  
4 vehicles in multimodal networks. While there have been a number of microsimulation  
5 applications for highway networks, the number of such applications for transit or intermodal  
6 networks is relatively small. Given the emphasis that is being placed on multimodal  
7 transportation system development, and the desire to institute fixed guideway systems that  
8 operate in mixed traffic, there is a need to develop simulation processes capable of reflecting the  
9 performance of mixed multimodal transportation networks under a variety of planning and  
10 operations scenarios. This paper describes results from the application of TRANSIMS to a light  
11 rail corridor in the Greater Phoenix metropolitan area. Results of the simulation exercise are  
12 intuitive and provide insights on how microsimulation model systems can prove to be effective  
13 tools in analyzing alternative multimodal transport network strategies.

14

15 **Keywords:** planning applications, light rail simulation, microsimulation model, multimodal  
16 network, TRANSIMS application

17

18

19

20

21

22

23

## 1 INTRODUCTION

2 Over the past decade, the transportation modeling profession has increasingly moved in the  
3 direction of deploying models capable of microsimulating activity-travel patterns and location  
4 choices in the time-space domain (Axhausen and Garling, 1992; Vovsha et al, 2002; Waddell et  
5 al, 2003). On the demand side, major advances have been made in implementing activity-based  
6 travel microsimulation models (Jonnalagadda et al, 2001), while on the supply side, key  
7 developments have occurred in simulating network dynamics using dynamic traffic assignment  
8 models and traffic microsimulation models (Mahmassani, 2001). Microsimulation models are  
9 capable of reflecting dynamics inherent in transportation systems and provide richer sets of  
10 outputs for making informed policy decisions (Kitamura et al, 1998). In response to different  
11 policies and strategies, it is possible to see how traffic patterns may shift and various socio-  
12 economic market segments may be differentially affected (Murray and Davis, 2001).

13 Although considerable progress has been made in the microsimulation of automobile  
14 traffic on roadway networks, an equivalent amount of progress has not been made on the transit  
15 and multimodal front. There is a rich body of evidence about the dynamics of automobile traffic  
16 and the models are quite sophisticated, capable of capturing driver behavior in dynamic networks  
17 (Lawe et al, 2009; Raney et al, 2003). On the other hand, the transit domain has generally not  
18 witnessed the same level of advances. There are a multitude of reasons for this. First, the  
19 modeling of transit networks is inherently far more complex on multiple fronts. Transit service  
20 is available only during specific hours and at certain locations along certain routes, stops are  
21 located at specific places on the network, and schedule and route configurations may vary by  
22 time of day, with peak periods seeing higher and better levels of service. In addition, transit  
23 service usage inevitably involves access and egress legs that entail the use of different modes.  
24 People may walk, bicycle, park-n-ride, or kiss-n-ride when it comes to transit access and egress.  
25 In other words, transit trips are virtually always multimodal journeys with an access leg, an  
26 egress leg, and a line-haul journey (which may itself involve transfers across modes). Transit  
27 trips are constrained by time-space accessibility and connectivity offered by the transit service.  
28 Second, there is less data available about transit behavior. Although transit trips are reported in  
29 surveys, providing data needed to estimate demand, very little is known about transit route  
30 choice behavior of humans in multimodal contexts. As a result, transit network simulation has  
31 largely remained the domain of academic exercises (Shalaby et al, 2003; Matisziw et al, 2006).

32 This paper aims to address the gap in the body of knowledge related to transit simulation.  
33 The paper describes the application of a transportation microsimulation model system called  
34 TRANSIMS (Smith et al, 1995; Rilett, 2001) to the analysis of a light rail corridor in the Greater  
35 Phoenix metropolitan region in the United States. As congestion continues to rise in  
36 metropolitan areas around the country, many are looking to expand the multimodal options  
37 available to travelers. In this context, an option often considered is that of light rail which  
38 operates largely in mixed traffic on fixed guideway. As a result of such a mixed operation, the  
39 implementation of a light rail line often has impacts on traffic conditions on the roadway along  
40 the light rail corridor as well as neighboring corridors which may be impacted by traffic  
41 diverting to side streets to avoid conflicts with the light rail system. While TRANSIMS has been  
42 extensively tested and used to address highway network issues and scenarios, it has rarely – if  
43 ever – been used to simulate multimodal transit networks including light rail. This paper  
44 describes the application of TRANSIMS to a variety of light rail scenarios, and presents results  
45 of the application to provide insights on the ability of microsimulation models such as

1 TRANSIMS to simulate multimodal network performance with specific emphasis on light rail  
2 corridors.

3 The remainder of this paper is organized as follows. The next section provides a  
4 description of the study area and the network scenarios analysed. The third section provides a  
5 description of the microsimulation model system, TRANSIMS, with specific emphasis on the  
6 process employed to simulate transit networks. The fourth section presents results of the case  
7 study application. The fifth section summarizes the knowledge gained through this exercise and  
8 offers insights into future research directions in the transit microsimulation arena.

9

## 10 **CASE STUDY APPLICATION CONTEXT**


11 In 2009, Phoenix, Arizona was the fifth most populous city in the United States and the most  
12 populous U.S. state capital. The metropolitan area as a whole falls within the 15 largest in the  
13 country. The mild winter climate attracts a large number of retirees to the suburban cities, and  
14 the area's development pattern in the midst of the undeveloped Sonoran Desert has lead to  
15 considerable urban sprawl in every direction. Over the past decade, the metropolitan area  
16 witnessed dramatic growth in population, housing, and employment. Much of the development  
17 occurred in the fringe areas, leading to large increases in vehicle miles of travel. Transportation  
18 planners in the region are concerned about the sustainability of the land use – transportation  
19 system and are seeking ways to enhance the livability in the region.

20 In December 2008, Valley Metro, the transit authority in Maricopa County, began service  
21 on a 20-mile line of light rail transit (LRT). This LRT line serves Mesa, Tempe, and Phoenix,  
22 connecting inner suburban neighborhoods to central city jobs and attractions. The rail provides  
23 service to and from some of the most widely visited attractions in the area, including professional  
24 baseball and basketball facilities, Phoenix Sky Harbor Airport, the central business districts of  
25 both Phoenix and Tempe, and Arizona State University's main and downtown campuses. The  
26 Phoenix TRANSIMS implementation has focused on the transit element of the regional  
27 transportation network, namely, the rail line and its potential improvements. The experiments  
28 described herein consider potential network changes to the currently operational light rail line  
29 and the extent of effects, if any, that would potentially be experienced by the highway network.

30 The Maricopa County regional TRANSIMS network consists of 13,145 bi-directional  
31 and one-way links which represent approximately 5,500 miles of roadway. The network connects  
32 activity locations spread across 2009 traffic analysis zones (TAZ's). There are 224 directional  
33 transit routes in service, including local buses, express or rapid buses, neighborhood shuttles, and  
34 light rail. The regional network accommodates approximately 15 million trips daily,  
35 approximately 77% of which are single-occupant personal vehicle trips. According to Valley  
36 Metro statistics, about 200,000 trips are made daily via the transit network, varying by month of  
37 year.

38 The first scenario to be considered in this experiment is the base year network. In this  
39 scenario, the LRT right of way is presented as it appears today, with service in either direction  
40 between 19<sup>th</sup> Avenue and Bethany Home Road in Phoenix and Main Street and Dobson Road in  
41 Mesa. The location of the base year LRT corridor is shown in Figure 1, falling between the two  
42 black lines as indicated. In the base network, LRT service is provided during the hours of 4:00  
43 AM to 11:00 PM, with headways of 12 minutes during peak periods (6:00 – 9:00 AM and 3:00 –  
44 6:00 PM) and 20 minutes during off-peak periods. In order to ensure that the differences in  
45 results are not simply due to random stochasticity of the simulation system, the base year  
46 scenario was simulated twice with identical random number seeds. These two simulations yield

1 identical results for each individual link, similar to results reported in earlier work (Lawe et al,  
2 2009; Ziems et al, 2011).  
3 Aside from the base network, three regional network scenarios in which LRT service is  
4 improved in some way were considered. A network scenario was considered in which light rail  
5 service is added during night-time hours, making the LRT a 24-hour transit line, and headways  
6 during the day are reduced. In this decreased-headway scenario, peak hour headways are reduced  
7 to 8 minutes while headways in off-peak periods are reduced to 15 minutes. Another scenario is  
8 considered in which the light rail right of way is extended farther into Phoenix in the north and  
9 farther into Mesa in the east. This extended service rail line is also depicted in Figure 1, showing  
10 that light rail in this scenario serves travelers from 19<sup>th</sup> Avenue and Dunlap Avenue to Main  
11 Street and Center Street. In this extended service scenario, headways remain the same as those in  
12 the base year network. Finally, a combination network scenario is considered that takes into  
13 account network improvements from both previous scenarios. This combination scenario extends  
14 light rail service to the north and east as in the extended service scenario, and provides decreased  
15 headways as in the decreased-headway extended hours scenario.  
16

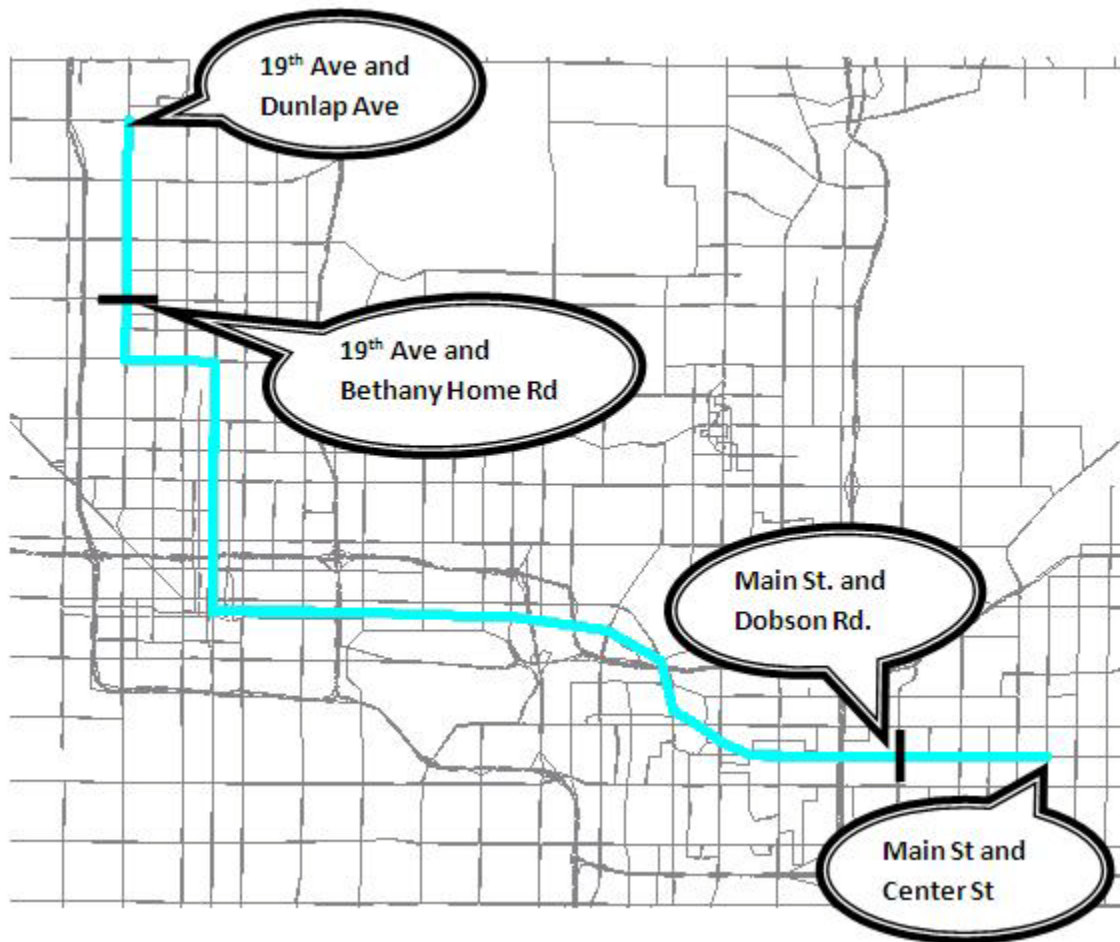

17  
18  
19  
20  
21  
22

**FIGURE 1 Light rail line in base year and extension scenario.**

## 1 **APPLICATION OF TRANSIMS**

2 The TRansportation ANalysis and SIMulation System (TRANSIMS) is a software originally  
3 developed at Los Alamos National Laboratories in response to U.S. legislation that called for  
4 more disaggregate methods for transportation modeling. Under the initiative of the Federal  
5 Highway Administration (FHWA), the system has since evolved and is now an open-source  
6 software package freely available to the public. The system has been applied in various contexts,  
7 although most of the studies are prototype experiments to test the feasibility of deploying the  
8 system for specific planning applications (e.g., Park and Kwak, 2011; Ullah et al, 2011;  
9 Zietsman and Rilett, 2002). TRANSIMS comprises a series of modules including a population  
10 synthesizer, an activity generator, a router, and a microsimulator, along with a few additional  
11 submodules that facilitate iterative processes during the simulation. One major recent  
12 development of the TRANSIMS enterprise is the release of a development environment called  
13 TRANSIMS Studio. This software, also an open source package, was used during the simulation  
14 portion of this scenario analysis.

15 The first step in a TRANSIMS implementation is to prepare the network. The network  
16 used in the Phoenix Area implementation was adapted from the network used by the Maricopa  
17 Association of Governments (MAG) four-step travel model. Using this network as a base, the  
18 TRANSIMS network was constructed to more closely replicate the real-world environment by  
19 deleting centroid connectors, which are not physically present, and by ensuring that speed and  
20 capacity on each link was set to an appropriate value. Though external network connectors are  
21 considered centroid connectors, they were not deleted from the network. Input link, node, and  
22 traffic analysis zone (TAZ) records were provided to the TRANSIMS network conversion tool,  
23 which in turn assigned signalized nodes, lane connectivities, and other functional network  
24 elements.

25 The transit network was also created using route stops and route characteristics from the  
26 four-step model network. The location of a route was defined by listing in order the nodes that a  
27 transit line passed from start to end point. If the route makes a stop at a particular node, it was  
28 given a dwell time greater than zero. Otherwise, dwell time remained zero and the node was  
29 considered a “pass by” node. The input file which defines route characteristics specified  
30 headways for each transit route and each service time period. Many adjustments were made to  
31 the network manually to accommodate the location of the light rail line in mixed traffic. The  
32 Valley Metro rail line links are not separated from the highway links, but rather each highway  
33 link along the rail corridor has one lane that is dedicated to light rail vehicles only. A lane use  
34 restriction file was used to force specific lanes on the links in the corridor to be classified as rail  
35 only for the entire 24-hour simulation. In addition to this, lane connectivity was manually  
36 updated to ensure that no auto travel lanes were connected to the rail lanes and vice versa.

37 For purposes of this study, origin-destination tables from the calibrated four-step travel  
38 model of the Maricopa Association of Governments were used to represent activity-travel  
39 demand by purpose and time-of-day. Origin-destination (O-D) tables were obtained, with  
40 separate tables for single-occupancy vehicle, high-occupancy vehicle (two passengers or more),  
41 local bus, express bus, light rail, and commercial vehicle trips. For each of these modes, aside  
42 from commercial vehicles and express bus, O-D tables were provided for each of six purposes.  
43 The express bus mode was considered only for the home-based work purpose. The result is a  
44 total of 44 O-D trip tables. The TRANSIMS trip conversion tool requires (for each trip table) a  
45 time of day distribution by which trip start and end times can be assigned to all trips. Six

1 different time distributions were computed from the 2009 National Household Travel Survey of  
2 the United States, with one distribution for each travel purpose.

3 When using the TRANSIMS trip conversion tool, each O-D table must be given a mode  
4 according to the TRANSIMS built-in mode codes. The modes available for representing transit  
5 trips are “transit” and “transit with rail bias.” Trials with different mode combinations in this  
6 particular region resulted in the most accurate number of transit boardings when all transit modes  
7 – be they bus or rail – were coded as “transit with rail bias.” This allowed each transit traveler  
8 the option to choose rail or bus service, depending on the mode that would serve the trip with the  
9 least impedance. In other words, although the total number of transit trips does not change from  
10 one scenario to the next, the split of total transit trips between bus and light rail can change in  
11 response to changes in service parameters. Thus, the microsimulation may be viewed as an  
12 operations microsimulation without consideration for potential mode shifts in demand that may  
13 occur as a result of changes in network level of service measures. Although not accounting for  
14 modal shifts is potentially a limitation of the study, it also provides a robust way to compare  
15 operational performance of the roadway corridors potentially impacted by the light rail line  
16 because the total transit demand is held constant across scenarios. Because of the uniformity in  
17 coding bus transit trips, the results of the simulation do not differentiate between the multiple  
18 types of bus service.

19 The simulation approach applied in the Maricopa County implementation used a 64-bit  
20 Windows machine and employed six processing cores, which is equivalent to six traveler  
21 partitions. One full microsimulation is completed in approximately 48 hours. The approach used  
22 here completes one initial routing process and is followed by a number of microsimulation  
23 stabilization process iterations. In an initial routing process, every trip that is generated from the  
24 trip conversion tool described above is entered into the router. The router then assigns a specific  
25 route path to each trip in the region. These route paths are summed over every link using an  
26 executable called “Plan Sum.” This submodule produces initial link performance measures  
27 without employing a full microsimulation.

28 The TRANSIMS microsimulator is a software module that considers the position of each  
29 vehicle and traveler in the network at every second in the simulation time period. This is  
30 achieved using a cellular-automata framework. In a cellular automata model, every link in the  
31 system is divided into a number of cells, each the length of one standard vehicle. Each cell can  
32 accommodate only one vehicle at a time. If, at a certain time step, the cell in front of a vehicle  
33 becomes open, then the vehicle may advance into that cell. Otherwise, the vehicle must remain  
34 stationary. The microsimulator can be customized for a particular implementation by adjusting  
35 parameters for following distance, reaction time, and look-ahead distance.

36 The first step of the microsimulation stabilization process is to use the initial link  
37 performance measures to create updated paths for all trips in the region. Simultaneously, the  
38 initial route paths and initial link performance measures are used to create a list of selected  
39 households who can improve their travel time by taking a different route. These selected  
40 households are re-routed and new route paths assigned. A percentage of these new route paths  
41 from the selected households are chosen to replace the specific household’s updated plans, which  
42 were calculated for all trips in the region. As iterations progress, this selection and replacement  
43 step becomes the relaxation technique which will eventually lead to convergence of routed plans.  
44 Finally, the route paths are given to the microsimulator, which calculates detailed link  
45 performance measures. These measures are then put back into the router and the process is  
46 repeated.


1 The Maricopa County implementation was validated based on ten iterations of the  
 2 microsimulation stabilization process, and the results are reported in Table 1. These results are  
 3 not necessarily final, as the authors plan to apply a user equilibrium process in the future. The  
 4 results at this stage show that TRANSIMS is over-estimating traffic on the highway network by  
 5 about 20 percent. The results of transit ridership, however, show that TRANSIMS comes within  
 6 eight percent of replicating boardings in either mode and within four percent overall.  
 7

**TABLE 1 Results of Calibration of TRANSIMS**

Facility Type	Number of Observations	Observed Vehicle Counts	TRANSIMS Volume	% Difference
Auto Mode Calibration				
Collector	228	769139	902272	17.31%
Expressway	69	598068	926566	54.93%
Freeway	49	3451424	4804426	39.20%
Major	3571	34868806	40892809	17.28%
<i>Total</i>	<i>3917</i>	<i>39687437</i>	<i>47526073</i>	<i>19.75%</i>
Transit Mode Calibration				
Mode Type	Number of Routes	Observed Boardings	TRANSIMS Estimated Boardings	% Difference
Local/Express Bus	222	204392	215508	5.44%
Light Rail	2	40772	37605	-7.77%
<i>Total</i>	<i>224</i>	<i>245164</i>	<i>253113</i>	<i>3.24%</i>

8  
 9 The scenario analysis presented in this paper is meant to compare the results of  
 10 microsimulation of various transit network changes, and not necessarily to replicate highway  
 11 volumes. Therefore, the level of calibration achieved in Table 1 was considered sufficient to  
 12 move forward with transit scenario analysis. In addition, to save on computational effort, the  
 13 scenario results are reported after only one iteration of the microsimulator stabilization process.  
 14 This is a limitation that will be addressed in future work; however, the fact that all scenarios used  
 15 the same experimental setup and number of iterations provides a reasonable ability to compare  
 16 outputs across scenarios. Results are aggregated over the LRT corridor as well as over a corridor  
 17 parallel to the LRT right of way. This is done in order to capture changes in highway  
 18 performance that potentially propagate through space. The project team also has the ability to  
 19 aggregate results of link performance over a buffer that surrounds the light rail. This buffer could  
 20 vary in size and could be used to capture effects of network changes over a larger area. For the  
 21 sake of brevity, this paper focuses exclusively on results along the LRT corridor and a close  
 22 parallel corridor only. Figure 2 depicts the LRT and parallel corridors as well as a 1-mile buffer  
 23 around the light rail.  
 24



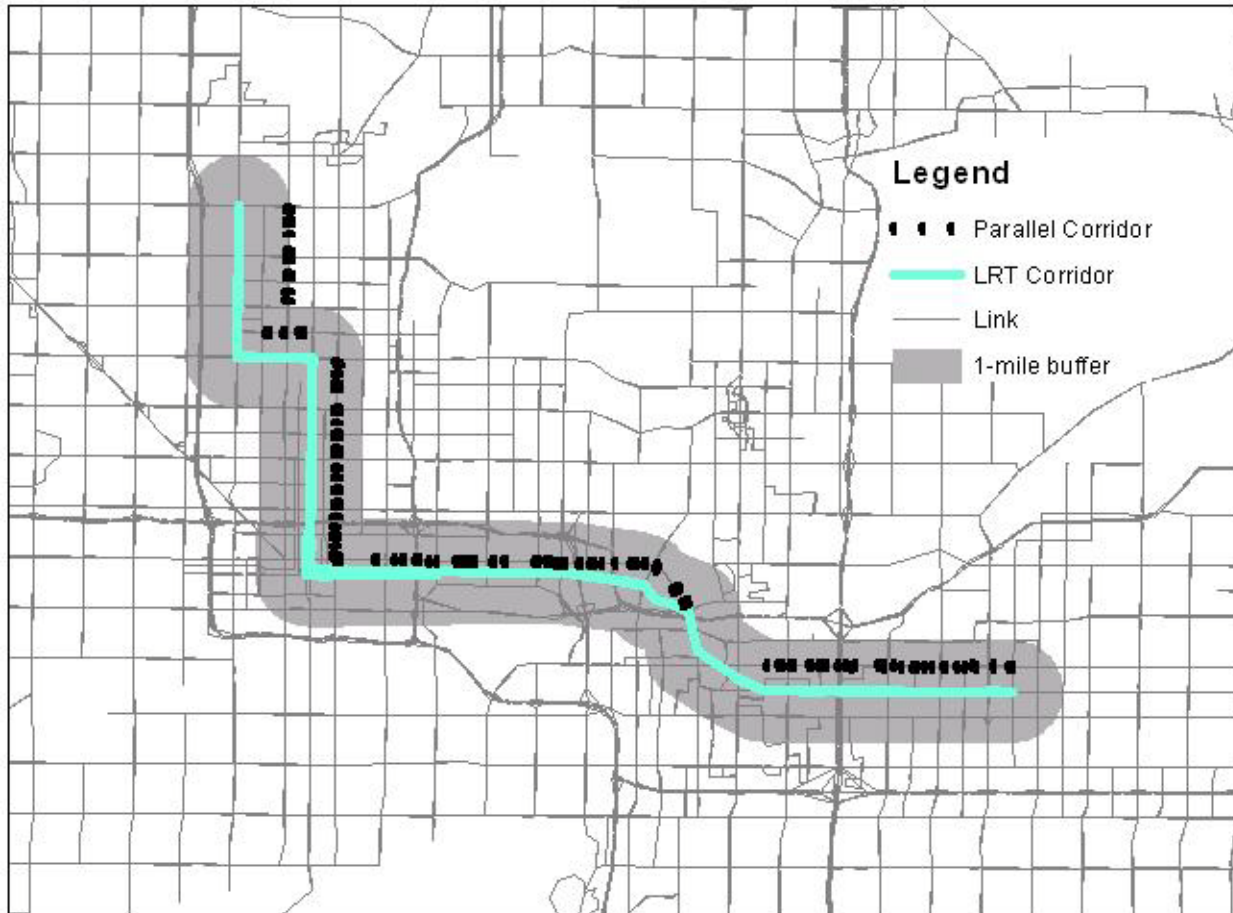

1  
2 **FIGURE 2 Rail corridor, parallel corridor, and buffer area for analysis.**

3  
4 **RESULTS OF SIMULATION EXPERIMENTS**

5 This section presents results of the simulation experiments conducted in this study. In order to  
6 examine how microsimulation models respond to different network investments, two scenarios  
7 and a combination scenario were considered. In one scenario, as previously described, light rail  
8 headways were greatly decreased. One could conjecture that the higher level of light rail service  
9 on the line would create more conflicts for traffic on links along the corridor and intersecting  
10 with the corridor leading to greater delays and congestion. The second scenario involved  
11 keeping headways as in the base case, but extending either end of the light rail line as explained  
12 in the second section of this paper. The extensions provide a greater level of light rail  
13 connectivity and access for individuals traveling between origins and destinations that fall within  
14 the influence zone of the light rail line. The combination scenario is a blend of the schedule  
15 frequency increase and the physical extensions of the light rail line on either end of the line.

16 Table 2 shows the change in light rail boardings as a result of changes in service  
17 attributes in the different scenarios. In the base case, there are a total of 35,463 boardings, which  
18 is a figure remarkably close to actual light rail boardings reported in the region (see Table 1).  
19 With a doubling of frequency, the ridership (number of boardings) is found to increase about 21  
20 percent; this value is consistent with elasticity measures reported in the literature regarding the  
21 sensitivity of boardings to changes in headway (Evans, 2004). In general, one can expect a 33

1 percent increase in ridership for a doubling of schedule frequency. The percent change in light  
 2 rail ridership seen in this study is consistent with that figure and somewhat conservative, thus  
 3 providing reasonable basis to assess the impact of service scenarios on traffic performance  
 4 measures. With light rail extensions, more households fall within the influence zone of the light  
 5 rail line and there are greater levels of network connectivity and accessibility offered by the light  
 6 rail. As a result, the number of light rail boardings is found to be substantially higher than the  
 7 base scenario, increasing by 25 percent. Again, this figure is quite reasonable and consistent  
 8 with expectations. In other words, it appears that the TRANSIMS routing and microsimulation  
 9 process is able to effectively apportion transit trips between bus and light rail for this case study.  
 10 Finally, with a combination scenario where headways are reduced and the light rail is extended  
 11 on either end, the boardings are found to increase more dramatically by about 45 percent. While  
 12 this figure may appear somewhat large, it should be noted that extending the light rail line on  
 13 either end and drastically reducing headways could have a substantial synergistic effect. Thus,  
 14 the cumulative impact of the two changes in service characteristics is found to be indeed about  
 15 equal to the sum of the individual scenario impacts.

16  
17  
18  
19 **TABLE 2 Comparison of Light Rail Boardings Across Scenarios**

Route	Base	Headway Scenario	% Change	Extension Scenario	% Change	Combination Scenario	% Change
South/East Bound	18531	22373	20.73%	22820	23.15%	26866	44.98%
West/North Bound	16932	20476	20.93%	21605	27.60%	24419	44.22%
<i>Total</i>	<i>35463</i>	<i>42849</i>	<i>20.83%</i>	<i>44425</i>	<i>25.27%</i>	<i>51285</i>	<i>44.62%</i>

20  
21 **Schedule Frequency Change**

22 Table 3 presents results of the scenario in which schedule frequency is increased on the light rail  
 23 line. The table provides output results for the roadway along the light rail corridor, and for the  
 24 immediate parallel corridor as described earlier in this paper. A variety of measures are  
 25 examined to obtain insights on how the change of headway impacts traffic conditions. The total  
 26 traffic volume is computed by aggregating time-of-day traffic volumes on each link of the  
 27 corridor over the entire day and then averaging across all links that comprise the corridor. It is  
 28 found that the daily volume on the roadway of the light rail corridor does not change appreciably  
 29 in response to a doubling of light rail frequency. As the figures in the table depict total volumes  
 30 of all vehicles (including light rail vehicles), it appears that the actual volume of automobile  
 31 traffic actually decreases in the light rail frequency doubling scenario. Perhaps, drivers are  
 32 diverting to parallel streets to avoid having to travel along the same right of way as a very  
 33 frequent light rail service. The average speed increases nominally and the average travel time  
 34 has a corresponding nominal decrease. The average delay per vehicle, represented as the total  
 35 accumulated travel time difference between free flow travel times and actual experienced travel  
 36 times also experiences a nominal decrease. Essentially, the average delay measure is a gap  
 37 function measuring the cumulative travel time deviation between free flow and actual conditions  
 38 over all travelers in that stretch of roadway. The maximum queue at any point along the corridor  
 39 is 12 vehicles and that figure does not change even after the doubling of schedule frequency. The  
 40 total number of cycle failures (where a vehicle is not able to clear an intersection within one

1 cycle), the total vehicle miles of travel, and the total vehicle hours of travel are all decreasing,  
2 suggesting that there must be some amount of diversion going on.

3 What is interesting to note is that the drivers are not necessarily diverting to the parallel  
4 corridor. In fact, it appears that some drivers from the parallel corridor may be diverting as well,  
5 perhaps seeking to travel on roadways that are farther away from the light rail corridor.  
6 However, despite the decrease in travel volume on the parallel corridor, most level of service  
7 measures show a deterioration (nominally). It is possible that, even with the diversion of road  
8 users off the parallel corridor, the impact of doubling light rail frequency may be rather negative  
9 because intersecting links (i.e., links that intersect the light rail corridor and the parallel corridor  
10 at right angles) may be experiencing a deterioration in network level of service measures. The  
11 deterioration on perpendicular links may be cascading on to the parallel corridor; and the effects  
12 are not worse simply because drivers appear to be diverting away from the parallel corridor as  
13 well. The average speed is nominally lower while the average travel time is slightly higher. The  
14 average delay increases as does the total cycle failures. Total vehicle miles of travel actually  
15 goes down suggesting that there is less traffic, but vehicle hours of travel increases implying that  
16 delays are greater. Overall it appears that the microsimulation model is able to capture the fine  
17 nuances associated with traffic diversions and network level of service changes. Note that these  
18 minor deviations are not due to the stochasticity of the process; the random number seeds are all  
19 the same from one scenario run to another and thus the differences seen in the tables are due to  
20 differences in network conditions.

### 21 22 **Light Rail Extension Scenario**

23 As mentioned earlier, the light rail corridor was extended by a few miles at each end to examine  
24 how such extensions would alter traffic dynamics. It should be recalled that the setup of the  
25 experiments would not allow a demand shift from one mode to another. The overall number of  
26 trips for each mode of transportation was held constant across scenarios, except that a  
27 reallocation of transit trips between light rail and transit was permitted. Thus, in response to a  
28 light rail enhancement, bus trips would decrease and light rail ridership (boardings) would  
29 increase. The base scenario for the extended light rail scenario includes more links and traffic  
30 because one now needs to consider a longer stretch of roadway along which the light rail line  
31 operates. The results of the scenario analysis are shown in the middle section of Table 3.

32 With the extension of the light rail corridor service (essentially taking away more lane  
33 mileage from automobile traffic), it is found that daily volume on the light rail corridor  
34 decreases, implying that traffic must be diverting to parallel streets. However, even with a lower  
35 vehicular volume on the corridor, it is interesting to see that conditions have deteriorated  
36 sufficiently to result in lower speeds and higher travel times. Average delays are higher and the  
37 number of cycle failures records a rather sharp increase. It appears that extending the light rail  
38 corridor into the high density areas of north Phoenix and downtown Mesa has an adverse impact  
39 on roadway traffic, more so than was experienced with a doubling of schedule frequency on the  
40 existing length of the light rail line. Again, it is important to note that the light rail extensions  
41 are literally taking away roadway traffic lanes and hence these results are quite behaviorally  
42 intuitive. The total vehicle miles of travel decreases along the corridor, but the total vehicle  
43 hours of travel increases.

44 Along the parallel corridor, the daily volume actually increases suggesting that some  
45 amount of traffic diversion has taken place to the parallel corridor. Despite this slight increase in  
46 volume of vehicles along the parallel corridor, it appears that conditions get surprisingly better.

1 It is not immediately intuitive as to why the parallel corridor actually shows improvement in  
2 network level of service measures despite an increase in traffic volume. The speed is marginally  
3 higher, the travel time is slightly lower, and average delays per vehicle are down. Likewise, the  
4 number of cycle failures, the total vehicle miles of travel, and the total vehicle hours of travel all  
5 show improvements relative to the base case. Here is another phenomenon taking place that  
6 explains why the parallel corridor is experiencing slightly improved conditions despite  
7 decreasing vehicular volume. Investigation reveals that bus ridership is going down because  
8 light rail boardings increase in response to improved level of service for rail. The bus ridership  
9 that is most affected is that occurring on the light rail corridor itself and parallel to the corridor.  
10 Although there is some traffic diversion to the parallel corridor resulting in an increase in  
11 vehicular volume, conditions are getting better because slow moving buses which adversely  
12 impede traffic flow are now speeding up. They have less dwell time at stops because they have  
13 fewer boardings. The speeding up of the buses generally results in an overall improvement of  
14 traffic conditions along the parallel corridor. The multimodal traffic microsimulation model  
15 system is capable of capturing such fine adjustments that could impact traffic flow. In the  
16 absence of a microsimulation model providing detailed information about every vehicle, traveler,  
17 route, stop, and corridor in the network, it would be impossible to glean enough details to explain  
18 the aggregate results that are being observed.

19

### 20 **The Combination Scenario**

21 Finally, the last part of Table 3 provides results from the application of TRANSIMS to the  
22 combination scenario. As expected, the results constitute an amalgamation of the findings  
23 reported in the context of the separate scenario runs. First, on the light rail corridor itself, there  
24 is a decrease in vehicular volume. This is reflective of the possible diversion that is taking place,  
25 both due to the increased schedule frequency and the extensions of the light rail line on either  
26 end. Thanks to this traffic diversion, the overall traffic speed decreases only very slightly;  
27 perhaps a greater deterioration in speed would have been observed had traffic diversion not  
28 occurred. The average travel time increases marginally as does the average delay per vehicle.  
29 The number of cycle failures increases, perhaps due to increasing conflicts and delays  
30 experienced at intersections. Due to the traffic diversion away from the light rail corridor, the  
31 total vehicle miles of travel on the corridor decreases; however, the total vehicle hours of delay  
32 increases due to the slight deterioration in travel speeds.

33 What is happening on the parallel corridor is quite interesting. There is a decrease in  
34 volume along the parallel corridor as well. In other words, the increase in schedule frequency is  
35 leading to traffic diverting to corridors beyond the immediate parallel corridor. As the parallel  
36 corridor is also potentially affected by the increased light rail schedule frequency, drivers are  
37 choosing to divert farther away to roadways that are virtually unaffected by changes in the light  
38 rail service frequency. In addition to a reduction of volume, the reduction of bus ridership on the  
39 parallel corridor speeds up the flow of traffic on the parallel corridor. The speed nominally  
40 increases, and the travel time decreases. Average delay per vehicle decreases. However, what is  
41 interesting is that the number of cycle failures increases. This is likely because of the delays and  
42 congestion being experienced on cross-streets due to the increased schedule frequency of the  
43 light rail line. As the cross-streets experience greater congestion and delays at intersections, so  
44 does the parallel corridor. Thus, there is a greater number of cycle failures; however, this  
45 increase in cycle failures does not adversely impact the experience of individual drivers as  
46 average speeds, travel times, and delay all record improvements. The reduction in volume is

1 associated with a decrease in vehicle miles of travel and total vehicle hours of travel also records  
 2 a slight decrease in a consistent way.

3

4 **TABLE 3 Results of Scenario Analysis**

Performance Measure	LRT Corridor			Parallel Corridor		
	Base	Scenario	% Change	Base	Scenario	% Change
<i>Comparison of Base to Headway Change Scenario</i>						
Daily Volume (veh)	66126	66135	0.01%	59930	59912	-0.03%
Average Speed (mph)	32.85	32.89	0.12%	29.41	29.37	-0.11%
Average Travel Time (min)	42.35	42.28	-0.15%	35.98	36.05	0.22%
Average Delay (sec)	541	537	-0.72%	539	544	0.88%
Maximum Queue (veh)	12	12	0.00%	13	13	0.00%
Num. Cycle Failures (veh)	39074	38371	-1.80%	53811	55982	4.03%
Total VMT (miles)	441823	441815	0.00%	386542	386428	-0.03%
Total VHT (hours)	19116	19104	-0.06%	17031	17050	0.11%
<i>Comparison of Base to Extended Light Rail Scenario</i>						
Daily Volume (veh)	89971	89866	-0.12%	83442	83465	0.03%
Average Speed (mph)	33.22	33.07	-0.45%	30.31	30.39	0.27%
Average Travel Time (min)	51.11	51.46	0.68%	45.69	45.46	-0.50%
Average Delay (sec)	629	650	3.30%	707	694	-1.92%
Maximum Queue (veh)	12	12	0.00%	13	13	0.00%
Num. Cycle Failures (veh)	56310	58771	4.37%	68824	67421	-2.04%
Total VMT (miles)	549168	548700	-0.09%	492532	492486	-0.01%
Total VHT (hours)	22543	22681	0.61%	21299	21241	-0.27%
<i>Comparison of Base to Combination Scenario</i>						
Daily Volume (veh)	89971	89847	-0.14%	83442	83418	-0.03%
Average Speed (mph)	33.22	33.21	-0.05%	30.31	30.35	0.15%
Average Travel Time (min)	51.11	51.26	0.29%	45.69	45.50	-0.40%
Average Delay (sec)	629	638	1.41%	707	696	-1.55%
Maximum Queue (veh)	12	12	0.00%	13	13	0.00%
Num. Cycle Failures (veh)	56310	56889	1.03%	68824	68875	0.07%
Total VMT (miles)	549168	548764	-0.07%	492532	492340	-0.04%
Total VHT (hours)	22543	22610	0.30%	21299	21264	-0.16%

5

## 6 **DISCUSSION AND CONCLUSIONS**

7 In this paper, the application of a travel microsimulation model system has been demonstrated in  
 8 the context of a transit network analysis. As urban metropolitan regions increasingly consider  
 9 expanding transit services to offer greater mobility options to residents and meet sustainability  
 10 goals and greenhouse gas emission reduction targets, it is clear that professionals will need to  
 11 have the ability to accurately simulate network conditions under a wide range of multimodal  
 12 scenarios. The Greater Phoenix region is no exception to this trend. With a rather new light rail  
 13 line and much interest in the community to analyze its performance, its impact on traffic and the  
 14 environment, and its role in shaping future land use patterns, there is considerable interest in the  
 15 development and deployment of microsimulation model systems capable of providing rich  
 16 information on network performance measures. Although there is considerable literature devoted  
 17 to the application of microsimulation models for highway automobile traffic simulation, there is  
 18 a paucity of literature dedicated to the application of transit network simulation models in a  
 19 multimodal context. The motivation for this particular research study stems from the wave of

1 interest in the United States to invest in fixed guideway light rail systems that operate in mixed  
2 traffic conditions. Many questions arise in this context. From a demand perspective, one is  
3 naturally interested in accurately forecasting ridership and boardings by stop by time of day.  
4 This paper is focused more on the operations side of the enterprise with a view to answering  
5 questions such as: How does a light rail line affect traffic congestion and delays along the  
6 corridor on which it operates and along the immediate parallel corridor to which traffic may  
7 divert? If traffic congestion and delays worsen, would the potential air quality benefits of a light  
8 rail line be partially offset by the increased emissions with cars stuck idling in congestion? How  
9 do traffic performance measures change in response to a variety of changes in service attributes  
10 of the light rail line?

11 In this study, the TRANSIMS microsimulation model system has been used to analyze  
12 the impacts of light rail on roadway corridor performance. The 20-mile light rail line in the  
13 Phoenix metro area constitutes the focus of this study. Using four-step travel model origin-  
14 destination tables (for 2009) from the regional metropolitan planning organization, more than 15  
15 million trips were routed and microsimulated for the entire Maricopa region. All of the bus and  
16 light rail trips from the 2009 origin-destination matrices were combined into transit, and  
17 TRANSIMS was allowed to apportion the transit trips between light rail and bus based on the  
18 best available option to execute each trip. Following an extensive calibration and validation  
19 process, TRANSIMS was applied to analyze the impacts of alternative light rail scenarios.

20 The analysis results show that TRANSIMS is able to capture the micro-level adjustments  
21 that are taking place as a result of changes in light rail service attributes. When service  
22 headways are drastically cut (i.e., schedule frequency is doubled), it is found that vehicles on the  
23 light rail corridor divert to alternate routes, thus ensuring no deterioration of performance on the  
24 light rail corridor. It appears that traffic diverts to streets farther away from the parallel corridor  
25 as volumes reduce on the parallel corridor as well. However, conditions deteriorate on the  
26 parallel corridor (slightly), due to congestion and conflicts at intersections (cross streets do not  
27 have the same throughput, as the light rail line crosses the intersection at twice the frequency  
28 than in the base scenario). When one considers a scenario where the light rail line is extended on  
29 either end, thus increasing network access and connectivity by light rail while taking away  
30 roadway lane capacity on the corridor, it is found that conditions on the light rail corridor  
31 deteriorate (presumably because of the loss of roadway lane capacity). Conditions on the  
32 parallel corridor improve despite the diversion of traffic to the parallel corridor for two reasons.  
33 First, as the headway is the same, there is no appreciable deterioration in intersection  
34 performance after the extensions are put in place. It is only when headway of service is  
35 drastically reduced that intersection performance deteriorates to the point of impacting parallel  
36 corridor performance. In the case of extending the light rail line with no change in headway, the  
37 intersections are performing the same way, but the conditions improve because bus ridership on  
38 the parallel corridor drops considerably. The drop in bus ridership presumably leads to improved  
39 bus speeds and performance, and as traffic shares the same roadway capacity with buses, the  
40 improved bus performance gets reflected in improved traffic conditions overall. It is true that  
41 bus ridership (on the parallel corridor) falls in the case of the scenario with headway changes as  
42 well. However, any improvement in bus performance in that scenario is neutralized by the  
43 increases in congestion and queues at intersections with cross street traffic (at least at some  
44 locations). As a result, there is a net deterioration in performance in the headway change  
45 scenario, but a net improvement in performance with the light rail extension scenario. The  
46 combination scenario involving a headway change and an extension on either end of the line is

1 associated with a modest deterioration of conditions on the light rail corridor itself and a slight  
 2 improvement of conditions on the parallel corridor, possibly due to the dramatic impact of the  
 3 dual light rail service changes on bus boardings on the parallel corridor. Table 4 shows the  
 4 impact of each scenario on bus boardings; it is seen that bus boardings decrease about 10 percent  
 5 in the separate scenarios. In the case of the headway scenario, the 10 percent reduction is not  
 6 sufficient to neutralize the deterioration in conditions at cross streets. In the combination  
 7 scenario however, the reduction of 18 percent is sufficient to neutralize the deterioration in cross  
 8 street intersection performance, thus yielding the modest improvements seen in the bottom  
 9 section of Table 3. The figures in Table 4 are quite robust as comparisons were also made in bus  
 10 boardings for a control group of links which were located very far away from the light rail buffer  
 11 area. Presumably, these control group links should see no change in bus boardings. Modest  
 12 changes are seen, possibly because the changes in light rail service attributes affect travel choices  
 13 beyond the confines of the buffer area. However, it is seen that the changes in bus boardings in  
 14 the parallel corridor are far greater than in the random distant control corridors.

15  
 16 **TABLE 4 Changes in Bus Boardings in Response to Changes in Light Rail Attributes**

Corridor		Boardings	% Change from Base Boardings
Base Network	Parallel Corridor	4997	-
	Control Corridor	2721	-
Headway Scenario	Parallel Corridor	4555	-9%
	Control Corridor	2658	-2%
Extensions Scenario	Parallel Corridor	4515	-10%
	Control Corridor	2630	-3%
Combination Scenario	Parallel Corridor	4077	-18%
	Control Corridor	2610	-4%

17  
 18 The study has shown that microsimulation model systems can prove to be effective tools  
 19 in analyzing complex inter-relationships that exist in multimodal transportation networks. The  
 20 findings of this study should not necessarily be used to make policy decisions related to the  
 21 implementation of changes in light rail service attributes, but should be viewed as indicative of  
 22 the types of benefits and advantages that one would accrue from using state-of-the-art  
 23 microsimulation models systems. There is much scope for additional research in this arena.  
 24 Microsimulation model systems should be applied to larger scale transit networks to truly  
 25 exercise the capabilities of the model and understand the types of information that they provide.  
 26 Within this paper, the activity demand component of the modeling enterprise was not  
 27 implemented. Changes in light rail service attributes did not result in modal shifts within the  
 28 TRANSIMS implementation of this paper. If modal shifts had been properly reflected, it is  
 29 likely that the results would have been different as some of the auto trips along the light rail  
 30 corridor and parallel corridors would have shifted to light rail. In this paper, only a reallocation  
 31 of transit trips between bus and rail was accommodated. Moving towards a truly integrated  
 32 activity-travel demand and network supply microsimulation model system would provide a

1 compelling framework to capture the full range of micro-adjustments in system performance that  
2 would result from a change in light rail service attributes.

#### 4 **ACKNOWLEDGMENTS**

5 The authors thank Vladimir Livshits, Systems Analysis Manager at the Maricopa Association of  
6 Governments, and his staff, for providing the data used in this project and for providing in-kind  
7 technical support throughout the study.

#### 9 **REFERENCES**

- 10 Arampatzis, G., C.T. Kiranoudis, P. Scaloubacas, and D. Assimacopoulos. A GIS-Based  
11 Decision Support System for Planning Urban Transportation Policies. *European Journal of*  
12 *Operational Research*, Vol. 152, 2004, pp. 465 – 475.
- 13 Axhausen, K., and T. Garling. Activity-based Approaches to Travel Analysis: Conceptual  
14 Frameworks, Models, and Research Problems. *Transport Reviews*, Vol. 12, No. 4, 1992,  
15 pp. 323-341.
- 16 Evans, J.E. Transit Scheduling and Frequency: Traveler Response to Transportation System  
17 Changes. Transit Cooperative Research Program Report 95: Chapter 9. Transportation  
18 Research Board, Washington, D.C., 2004
- 19 Jonnalagadda, N., J. Freedman, W.A. Davidson, and J.D. Hunt. Development of Microsimulation  
20 Activity-Based Model for San Francisco: Destination and Mode Choice Models. In  
21 *Transportation Research Record: Journal of the Transportation Research Board*, No.  
22 1777, Transportation Research Board of the National Academies, Washington, D.C., 2001,  
23 pp. 25 – 35.
- 24 Kitamura, R., S. Fujii, A. Kikuchi, and T. Yamamoto. An Application of a Micro-Simulator of  
25 Daily Travel and Dynamic Network Flow to Evaluate the Effectiveness of Selected TDM  
26 Measures for CO2 Emissions Reduction. CD-ROM of the 77<sup>th</sup> Annual Meeting of the  
27 Transportation Research Board, Washington D.C., 1998.
- 28 Lawe, S., J. Lobb, A.W. Sadek, S. Huang, and C. Xie. TRANSIMS Implementation in  
29 Chittenden County, Vermont: Development, Calibration, and Preliminary Sensitivity  
30 Analysis. In *Transportation Research Record: Journal of the Transportation Research*  
31 *Board*, No. 2132, Transportation Research Board of the National Academies, Washington,  
32 D.C., 2009, pp. 113 – 121.
- 33 Mahmassani, H.S. Dynamic Network Traffic Assignment and Simulation Methodology for  
34 Advanced System Management Applications. *Networks and Spatial Economics*, Vol. 1.  
35 No. 3-4, 2001, pp. 267-292.
- 36 Matisziw, T. C., A. T. Murray, and C. Kim. Strategic Route Extension in Transit Networks.  
37 *European Journal of Operational Research*, Vol. 171, 2006, pp. 661 – 673.
- 38 Murray, A.T., and R. Davis. Equity in Regional Service Provision. *Journal of Regional Science*,  
39 Vol. 41, 2001, pp. 577 – 600.
- 40 Park, B. B., and J. Kwak. Calibration and Validation of TRANSIMS Microsimulator for an  
41 Urban Arterial Network. *KSCE Journal of Civil Engineering*, Vol. 15, No. 6, 2011, pp.  
42 1091-1100.
- 43 Raney B., N. Cetin, A. Völlmy, M. Vrtic, K. Axhausen, and K. Nagel. An Agent-Based  
44 Microsimulation Model of Swiss Travel: First Results. *Networks and Spatial Economics*,  
45 Vol. 3, No. 1, 2003, pp. 23-41.



- 1 Rilett, L. R. Transportation Planning and TRANSIMS Microsimulation Model: Preparing for the  
2 Transition. In *Transportation Research Record: Journal of the Transportation Research*  
3 *Board*, No. 1777, Transportation Research Board of the National Academies, Washington,  
4 D.C., 2001, pp. 84 – 92.
- 5 Shalaby, A., B. Abdulhai, and J. Lee. Assessment of Streetcar Transit Priority Options Using  
6 Microsimulation Modeling. *Canadian Journal of Civil Engineering*, Vol. 30, No. 3, 2003,  
7 pp. 1000-1009.
- 8 Smith, L., R. Beckman, D. Anson, K. Nagel, and M. Williams. TRANSIMS: TRansportation  
9 ANalysis and SIMulation System. Publication LA-UR-951664. Los Alamos National  
10 Laboratory Unclassified Report, 1995.
- 11 Ullah, M. S., A. Rahman, R. Morocoima-Black, and A. Mohideen. Travel Demand Modeling for  
12 a Small MPO Using TRANSIMS. DVD-ROM of the 90th Annual Meeting of the  
13 Transportation Research Board, Washington D.C., 2011.
- 14 Vovsha, P., E. Petersen, and R. Donnelly. Microsimulation in Travel Demand Modeling:  
15 Lessons Learned from the New York Best Practice Model. In *Transportation Research*  
16 *Record: Journal of the Transportation Research Board*, No. 1805, Transportation Research  
17 Board of the National Academies, Washington, D.C., 2002, pp. 68-77.
- 18 Waddell, P.A., A. Borning, M. Noth, N. Freier, M. Becke, and G. Ulfarsson. Microsimulation of  
19 Urban Development and Location Choices: Design and Implementation of UrbanSim.  
20 *Networks and Spatial Economics*, Vol. 3, No. 1, 2003, pp. 43-67.
- 21 Ziems, S.E., B. Sana, J. Plotz, and R.M. Pendyala. Stochastic Variability in Microsimulation  
22 Modeling Results and Convergence of Corridor-Level Characteristics. DVD-ROM of the  
23 90<sup>th</sup> Annual Meeting of the Transportation Research Board, Washington D.C., 2011.
- 24 Zietsman, J. and L.R. Rilett. Using TRANSIMS in Transportation Decision Making. CD-ROM  
25 of the 8<sup>th</sup> Transportation Research Board Conference on the Application of Transportation  
26 Planning Methods, Transportation Research Board, Washington, D.C., 2002.
- 27  
28